

Delta D400 Round Manhole

Data Sheet: ISSUE 01




Delta is designed to support light traffic. It is perfect for installing on roads with an ADT of 500 to 1,000, particularly road carriageways (including pedestrian streets), stabilised hard shoulders and parking areas for all manner of vehicles.

Specification

- ◆ Ductile Iron (Spheroidal Graphite)
- ◆ EN-GJS-500-7 (Material Standard)
- ◆ EN124 - Class D400 (Product Standard)

Features

- ◆ Easy opening hinge
- ◆ Plastic security spring
- ◆ 90° safety locking and maximum aperture angle of 130°
- ◆ Sound-proof joint included
- ◆ Metal non-slip surface
- ◆ Coated with non-toxic, non-flammable and non-polluting water-soluble black paint.

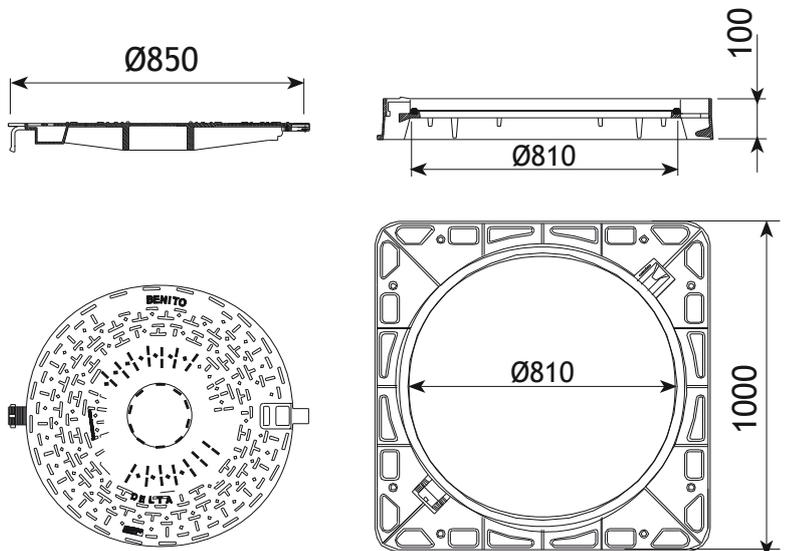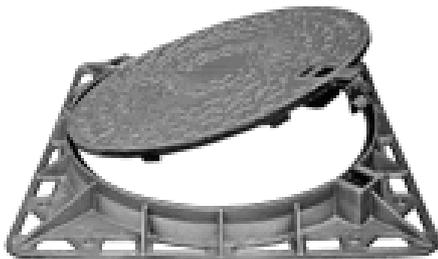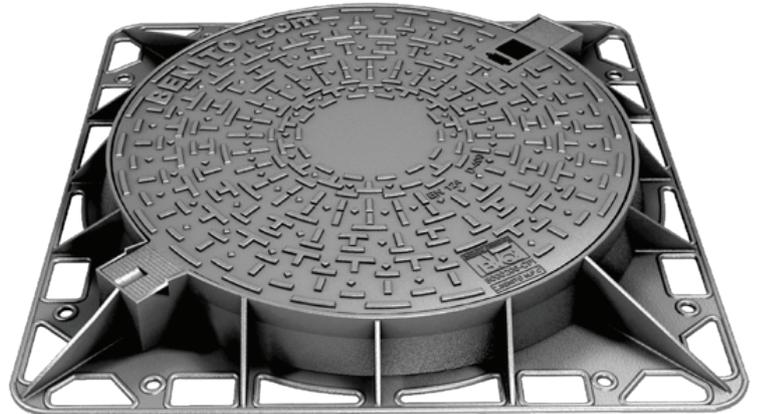

IPL group

Slane Road, Drogheda,
Co. Louth, Ireland.
Tel: +353 41 983 2591
Fax: +353 41 983 2599
Email: info@ipl.ie
Website: www.iplgroup.com



Technical Data

EN124 Class	Frame Opening (mm)	Frame Size (mm)	Frame Depth (mm)	Weight (kg)	Waterway Area
D400	Ø810	1000x1000	100	20	n/a

Group 4: Carriageways of roads (including pedestrian streets), hard shoulders and parking areas for all types of road vehicles.



Further information on DELTA manhole covers and gratings is available at www.iplgroup.com. Measurements and weights are approximate. The designs are the property of Innovative Products Ltd (IPL group) and may not be reproduced without express permission. Innovative Products reserve the right to amend specifications or to withdraw models without prior notice. © April 2017.