
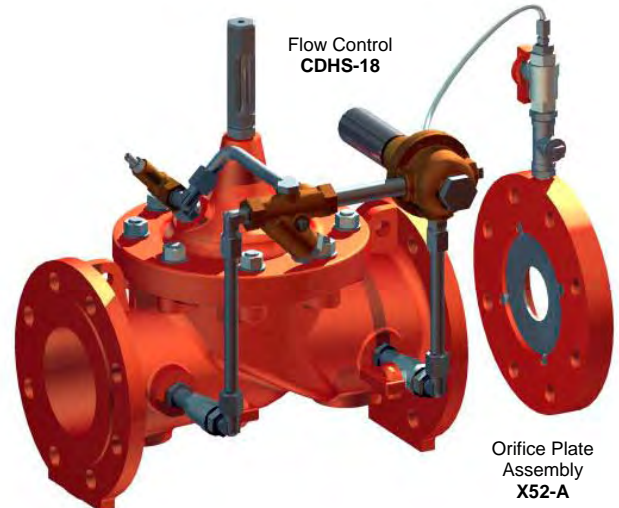


### ► Simple, Reliable and Accurate

- Completely Automatic Operation
- Easy Adjustment and Maintenance
- Quality Approved Materials
- World Wide Support

### ► CLA-VAL SERIES 40 Main Function

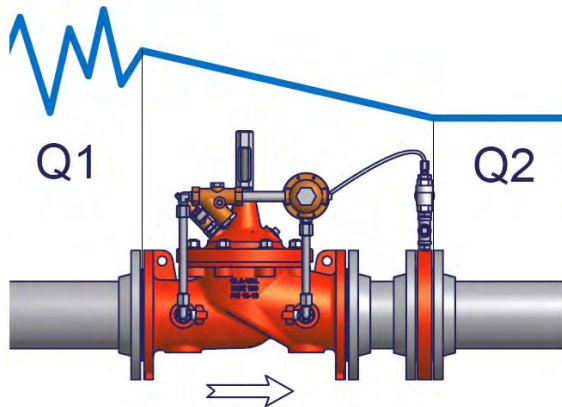

The CLA-VAL SERIES 40 is used to accurately limit excessive flow to a preselected maximum rate (Flow Control) regardless of changes in pressure and/or varying inlet flow.

The Orifice Plate Assembly is included.

### ► CLA-VAL 40-01 Typical Application


The CLA-VAL 40-01 is typically installed where water supply to a system (inlet to a reservoir, industrial users, etc.) must be limited to a maximum flow rate.

The Orifice Plate Assembly may be fixed directly to the main valve outlet flange, however, better control is obtained if it is installed in stabilized flow conditions downstream of the valve.

### *Make your valve even Better!*

LFS Option?	<u>Control</u> Low flows or night flows
KO Option?	<u>Extend</u> valve life with Anti-Cavitation trim
KG1 Option?	<u>Use</u> stem cleaning for harsh water
Maintenance?	<u>Check</u> on periodic maintenance
Environment?	<u>Adapt</u> to high temperatures or frost risk
Security?	<u>Add</u> hydraulic safety back-up to your valve
Protection?	<u>Remove</u> excessive system overpressures
Corrosion?	<u>Protect</u> your valve with upgraded materials

*Not just Products but Solutions: contact CLA-VAL!*

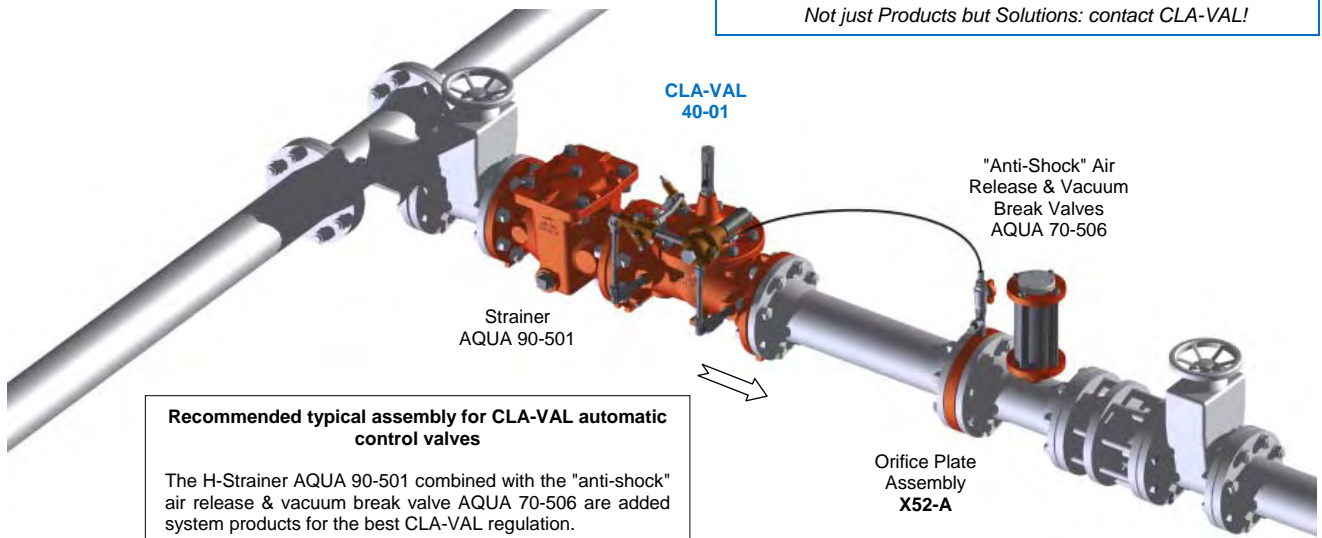

#### Recommended typical assembly for CLA-VAL automatic control valves

The H-Strainer AQUA 90-501 combined with the "anti-shock" air release & vacuum break valve AQUA 70-506 are added system products for the best CLA-VAL regulation.